


INFACOM

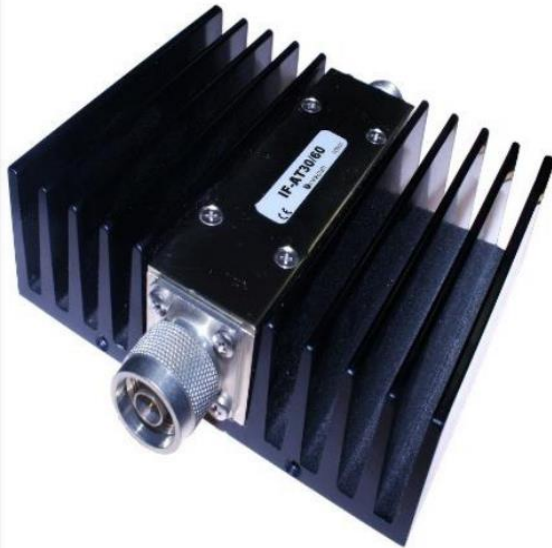

ATTENUATORS

INNOVATION . QUALITY . RELIABILITY

FIXED ATTENUATORS 25 W

Model	Operating frequency (MHz)	Attenuation (db)	VSWR	Power (W)
IF-AT03/25	DC-3000	3	1.30/1	25
IF-AT06/25	DC-3000	6	1.30/1	25
IF-AT10/25	DC-3000	10	1.30/1	25
IF-AT20/25	DC-3000	20	1.30/1	25
IF-AT30/25	DC-3000	30	1.30/1	25

FIXED ATTENUATORS 40 W

Model	Operating frequency (MHz)	Attenuation (db)	VSWR	Power (W)
IF-AT03/40	DC-3000	3	1.30/1	40
IF-AT06/40	DC-3000	6	1.30/1	40
IF-AT10/40	DC-3000	10	1.30/1	40
IF-AT20/40	DC-3000	20	1.30/1	40
IF-AT30/40	DC-3000	30	1.30/1	40



FIXED ATTENUATORS 60 W

Model	Operating frequency (MHz)	Attenuation (db)	VSWR	Power (W)
IF-AT03/60	DC-3000	3	1.30/1	60
IF-AT06/60	DC-3000	6	1.30/1	60
IF-AT10/60	DC-3000	10	1.30/1	60
IF-AT20/60	DC-3000	20	1.30/1	60
IF-AT30/60	DC-3000	30	1.30/1	60

DIGITAL ATTENUATORS

Model	Operating frequency (GHz)	Insertion loss (db)	Attenuation (db)	Supply (VDC)	Control	VSWR	Power (W)
IF-AT100	DC-6	1.5	0-60	12	TTL	1.3/1	10
IF-AT101	DC-18	2.7	0-60	12	TTL	2/1	0.1



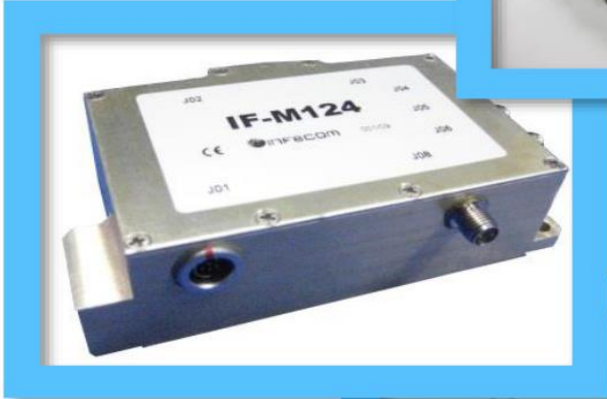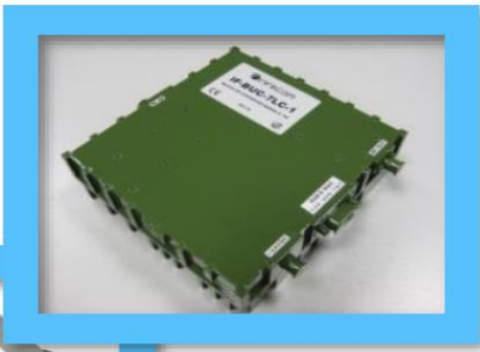

 **INFACOM**

C/ Tumaco, 18 28027 Madrid
Info@infacom.es www.infacom.es